


Centrifugal Direct-Drive In-Line Duct Blower




Designed for indoor clean air applications including intake, exhaust, return, or make-up air systems in industrial or commercial buildings. Rugged construction allows fan to be installed in ductwork either horizontally or vertically. Duct collars provide easy duct connections.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- NEMA 1 junction box included
- Units are speed controllable
- Maximum inlet air temperature: 104° F
- UL/cUL 705 Listed for Power Ventilators

AMCA Sound & Air Dayton Electric Mfg. Co. certifies that the blowers shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.




CSA Certified Motor

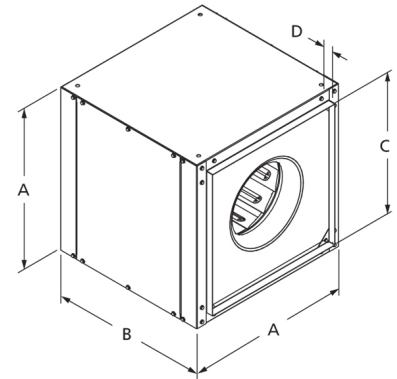

A	B	C	D
15 in	16 in	11 7/8 in	1 in

Performance Characteristics

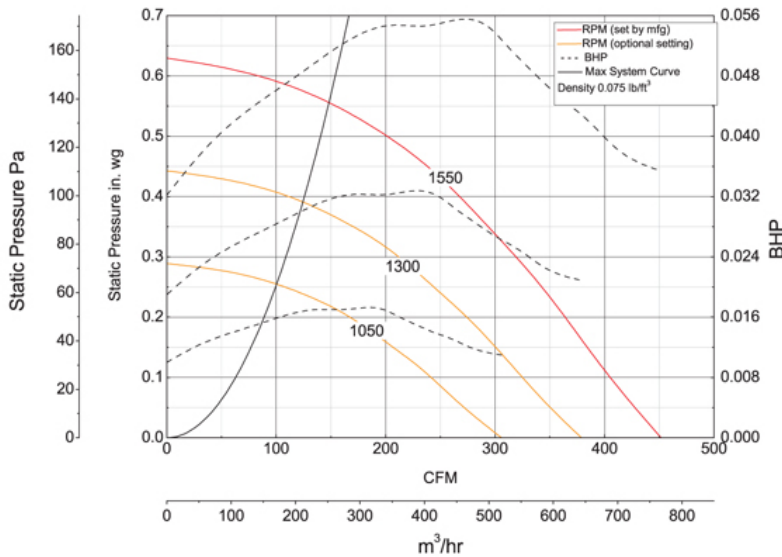

Construction Features

Impeller Diameter (Typ.)	11 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	104 °F
Warranty Length	1 Year

Motor Information

Motor Item Number	52R993
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Totally Enclosed Air-Over
RPM	1,550 rpm, 1,300 rpm, 1,050 rpm
Full Load Amps	1.5

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP
1/12	0.02	1050	CFM	306	225	104	—	—
			Sones	3.8	3.6	4.1	—	—
1/12	0.03	1300	CFM	378	312	244	140	—
			Sones	5.4	5.4	5.4	5.5	—
1/12	0.06	1550	CFM	451	394	342	280	201
			Sones	7.3	7.3	7.2	7.3	7.6

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type B: Free inlet hemispherical fan sone levels.