

Job Name: Mark: Submitted By: Date:4/3/2025

Blowers

D

Δ


С

11 7/8 in


D

1 in

### **Centrifugal Direct-Drive In-Line Duct Blower**

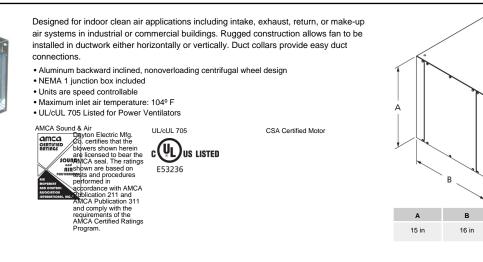

## **Performance Characteristics**

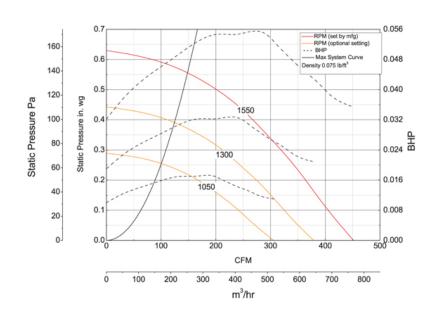

# **Construction Features**

Impeller Diameter (Typ.)	10 in
Impeller Type	11 in
Impeller Type	Propeller
Backward Inclined Centrifugal	Impeller Material
Impeller Material	Aluminum
Max Inlet Temp	Aluminum
Number of Blades	104 °F
4	Warranty Length
Max Inlet Temp	120 °F
Warranty Length	1 Year

#### **Motor Information**

Motor Item Number	4YY56
115	Voltage
Voltage	60 Hz
115	Motor Phase
Hertz (Cycle)	60 Hz
1	Motor Phase
Motor Enclosure	1
Totally Enclosed Air-Over	Motor Enclosure
RPM	Totally Enclosed Air-Over
RPM	1,550 rpm, 1,300 rpm, 1,050 rpm
Full Load Amps	1.5
1,750 rpm	Full Load Amps

## Air & Sound Performance

342	280
7.2	7.3
Impeller Diameter (Typ.)	201
	7.6

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type B: Free inlet hemispherical fan sone levels.