

## Centrifugal Belt-Drive Upblast Exhaust Ventilator




Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762

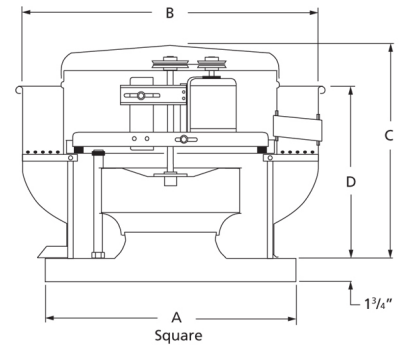

A	B	C	D
19 in	24 7/8 in	25 1/8 in	17 3/8 in

## Performance Characteristics

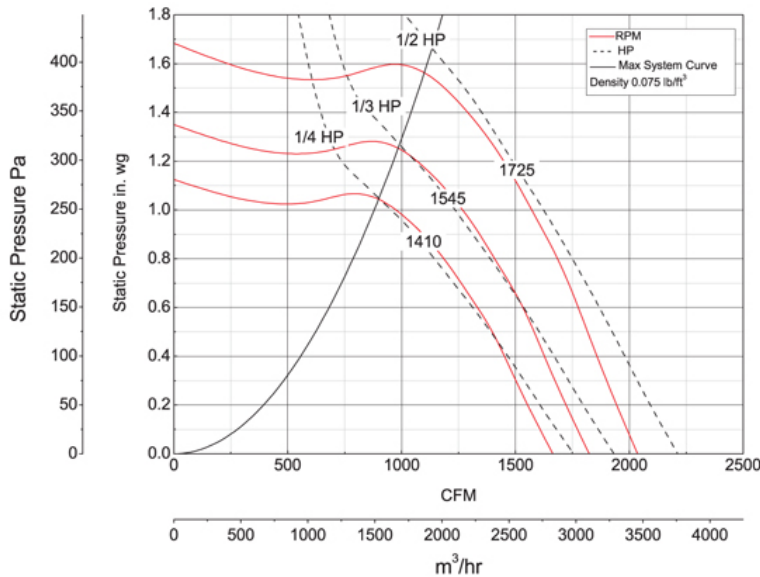

## Construction Features

<b>Impeller Diameter (Typ.)</b>	12 1/2 in
<b>Impeller Type</b>	Backward Inclined Centrifugal
<b>Impeller Material</b>	Aluminum
<b>Max Inlet Temp</b>	300 °F
<b>Bearing Type</b>	Sealed Pillow Block
<b>Drive Package Description</b>	Drives By Others
<b>Warranty Length</b>	1 Year

## Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP
1/4	0.26	1410	CFM	1665	1595	1528	1463	1398	1315	1224	1111	968	—	—
			Sones	11.1	11.6	12.2	12.5	12.6	12.7	12.7	12.5	12.3	—	—
1/3	0.34	1545	CFM	1824	1760	1699	1639	1580	1518	1441	1358	1262	990	—
			Sones	12.8	13.4	14.0	14.5	14.7	14.8	14.9	14.9	14.9	14.6	—
1/2	0.48	1725	CFM	2037	1979	1923	1869	1816	1763	1710	1642	1571	1406	1176
			Sones	15.6	16.1	16.7	17.3	17.9	18.2	18.4	18.7	18.7	18.6	18.4

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sonas at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.