

## Assembled Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours


AMCA Sound & Air Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to use the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




E53236  
MH12596

CSA Certified Motor

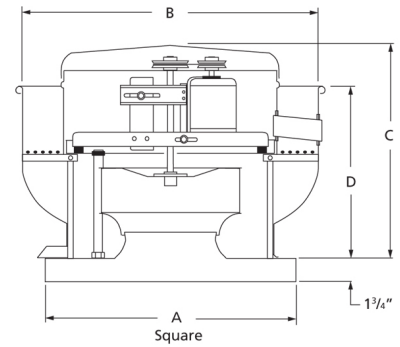

A	B	C	D
26 in	28 7/8 in	26 3/8 in	19 3/8 in

## Performance Characteristics

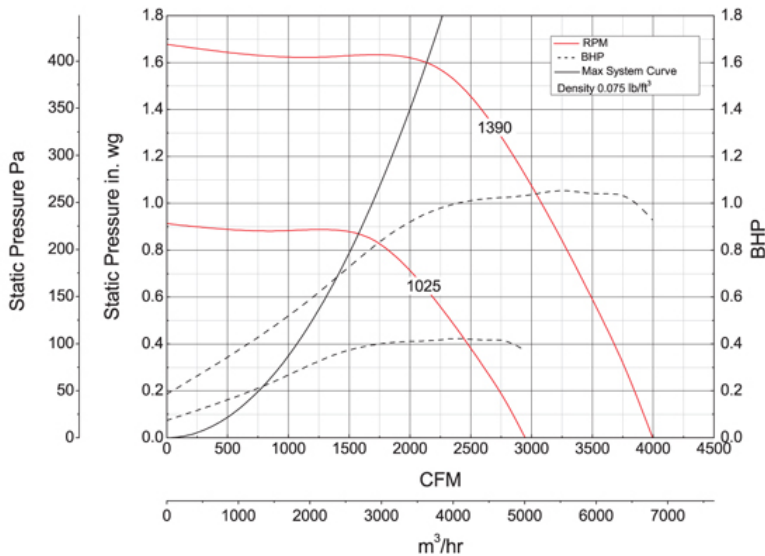

## Construction Features

<b>Impeller Diameter (Typ.)</b>	16 1/2 in
<b>Impeller Type</b>	Backward Inclined Centrifugal
<b>Impeller Material</b>	Aluminum
<b>Max Inlet Temp</b>	300 °F
<b>Bearing Type</b>	Sealed Pillow Block
<b>Drive Package Description</b>	Drives Assembled
<b>Warranty Length</b>	1 Year

## Motor Information

<b>Motor Item Number</b>	4YU30
<b>Voltage</b>	115/208-230
<b>Hertz (Cycle)</b>	60 Hz
<b>Motor Phase</b>	1
<b>Motor Enclosure</b>	Open Drip Proof
<b>RPM</b>	1,725 rpm
<b>Full Load Amps</b>	12.8/6.4-6.4

## Other Components

Component	Description	Item #
Fan Description	Exhaust Fan	—
Belt	AX22 (QTY: 1)	3VU41
Driver Sheave	1VP40x5/8	3X264
Driven Sheave	BK55H	3X587
Driven Bushing	H x 3/4	3X573

## Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP
1	1.05	1390	CFM	3996	3901	3806	3698	3584	3464	3340	3213	3078	2785	2394
			Sones	22.0	21.0	21.0	20.0	19.9	19.6	19.4	19.2	19.0	18.6	18.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

## Operating Range of Drive Package

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	1361	1324	1286	1249	1212	1175	1137	1100	1063	1025	—