

Standard-Duty Belt-Drive Exhaust Fan




Designed for commercial and industrial applications requiring high volumes of air at low static pressures. Construction includes rigid drive frame rails and one-piece motor/bearing plate. Mount fan in vertical position for exhaust applications or horizontal position for supply applications.

- Variable pitch adjustable motor pulley to optimize fan performance
- 6-Blade reinforced galvanized steel propellers
- Maximum inlet air temperature: 104° F




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

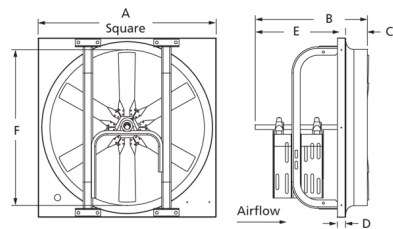

| A | B | C | D | E | F |
|-------|-----------|----------|------|-----------|-----------|
| 24 in | 19 1/2 in | 3 1/4 in | 1 in | 16 1/4 in | 20 1/2 in |

Performance Characteristics

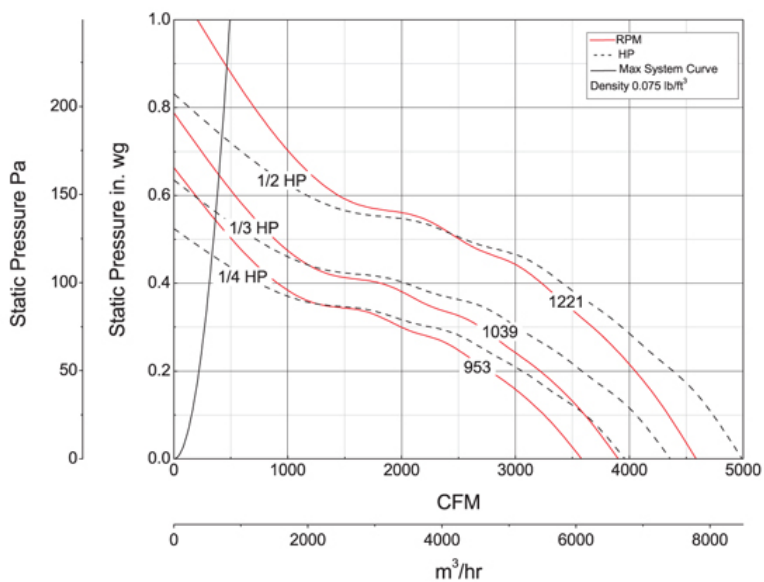

Construction Features

| | |
|----------------------------------|---------------------|
| Impeller Diameter (Typ.) | 20 in |
| Impeller Type | Propeller |
| Impeller Material | Steel |
| Number of Blades | 6 |
| Max Inlet Temp | 104 °F |
| Bearing Type | Sealed Pillow Block |
| Drive Package Description | Drives By Others |
| Warranty Length | 1 Year |

Air & Sound Performance

| Motor HP | Max BHP | Fan RPM | CFM @ | 0.000" SP | 0.125" SP | 0.250" SP | 0.375" SP | 0.500" SP | 0.625" SP | 0.750" SP |
|----------|---------|---------|-------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1/4 | 0.30 | 953 | CFM | 3581 | 3148 | 2469 | 1160 | 657 | — | — |
| | | | Sones | 16.2 | 16.2 | 16.3 | 16.1 | 16.0 | — | — |
| 1/3 | 0.40 | 1039 | CFM | 3904 | 3517 | 2954 | 2039 | 1064 | 603 | — |
| | | | Sones | 17.2 | 17.2 | 17.2 | 17.4 | 18.4 | 19.0 | — |
| 1/2 | 0.60 | 1221 | CFM | 4587 | 4277 | 3873 | 3333 | 2514 | 1456 | 1064 |
| | | | Sones | 20.0 | 20.0 | 20.0 | 21.0 | 21.0 | 23.0 | 24.0 |

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical fan sone levels.