

Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Regreaseable pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




E53236
MH12596

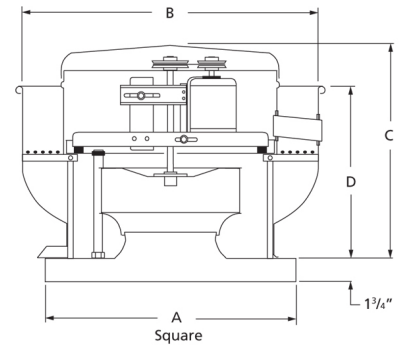

A	B	C	D
34 in	42 3/4 in	39 1/2 in	25 1/2 in

Performance Characteristics

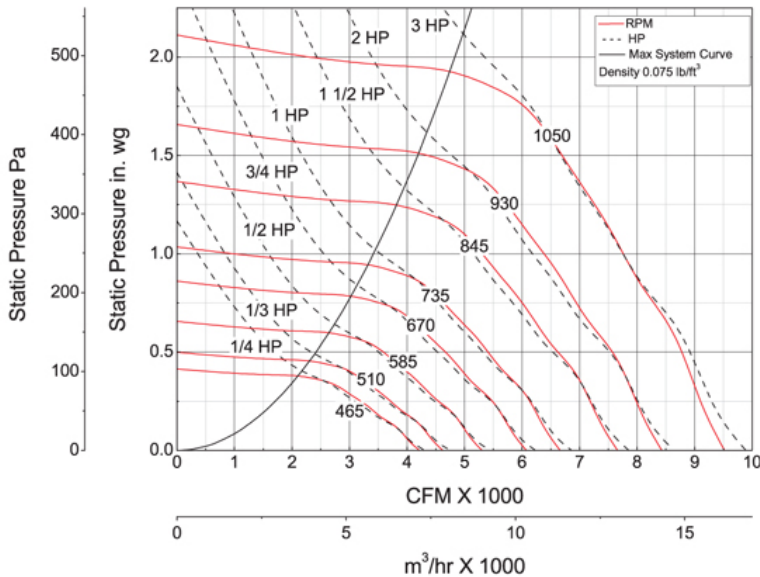

Construction Features

Impeller Diameter (Typ.)	20 in
Impeller Type	Propeller
Impeller Material	Steel
Number of Blades	6
Max Inlet Temp	104 °F
Bearing Type	Sealed Pillow Block
Drive Package Description	Drives By Others
Warranty Length	1 Year

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP
1/4	0.30	953	CFM	3581	3148	2469	1160	657	—	—
			Sones	16.2	16.2	16.3	16.1	16.0	—	—
1/3	0.40	1039	CFM	3904	3517	2954	2039	1064	603	—
			Sones	17.2	17.2	17.2	17.4	18.4	19.0	—
1/2	0.60	1221	CFM	4587	4277	3873	3333	2514	1456	1064
			Sones	20.0	20.0	20.0	21.0	21.0	23.0	24.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.