


**Axial Belt-Drive Upblast Exhaust Ventilator**




Designed for use in industrial and commercial buildings such as warehouses, manufacturing facilities, foundries, and laboratories. Housing is constructed of heavy gauge galvanized steel. The windband is removable for easy inspection. Lifting lugs are provided.

- Maximum inlet air temperature: 120° F
- UL/cUL 705 Listed for Power Ventilators
- Air handling quality bearings meet minimum of L10-100,000 hours
- Regreaseable pillow block bearings




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

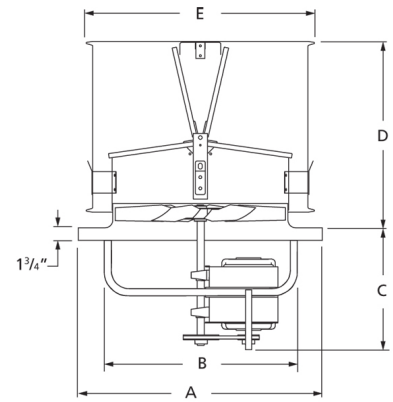

A	B	C	D	E
66 1/2 in	61 1/4 in	28 in	45 in	62 5/8 in

**Performance Characteristics**

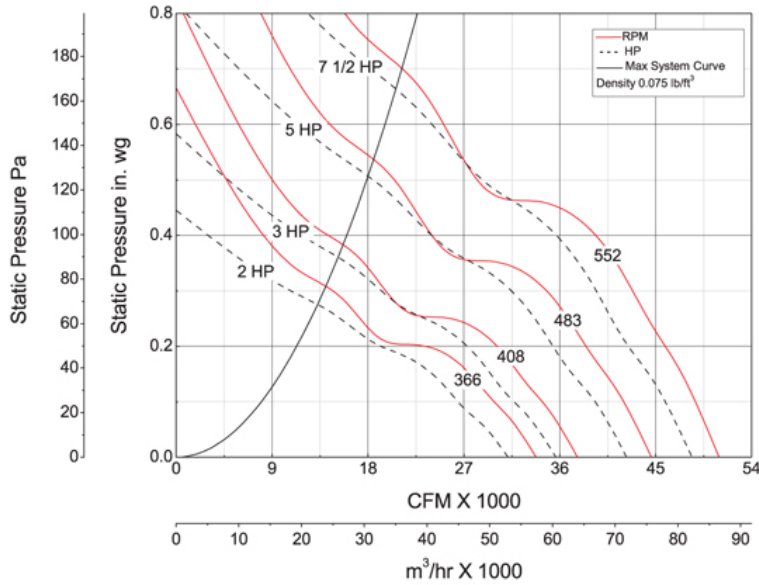

**Construction Features**

<b>Impeller Diameter (Typ.)</b>	54 in
<b>Impeller Type</b>	Propeller
<b>Impeller Material</b>	Steel
<b>Number of Blades</b>	5
<b>Max Inlet Temp</b>	120 °F
<b>Bearing Type</b>	Regreaseable Pillow Block
<b>Drive Package Description</b>	Drives By Others
<b>Warranty Length</b>	1 Year

**Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP
2	2.61	366	CFM	33,788	28,700	17,378	—	—
			Sones	16.7	17.0	17.0	—	—
3	3.62	408	CFM	37,655	33,239	25,221	—	—
			Sones	21.0	21.0	22.0	—	—
5	5.97	483	CFM	44,589	41,195	36,770	25,204	20,392
			Sones	30.0	29.0	29.0	32.0	31.0
7 1/2	8.98	552	CFM	50,958	48,034	44,312	40,154	28,469
			Sones	39.0	39.0	38.0	37.0	47.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.