Job Name: Mark:


Stock No.

1UBH7


Submitted By: Date:4/19/2025

Fans

Silent Low-Profile Ceiling Fan

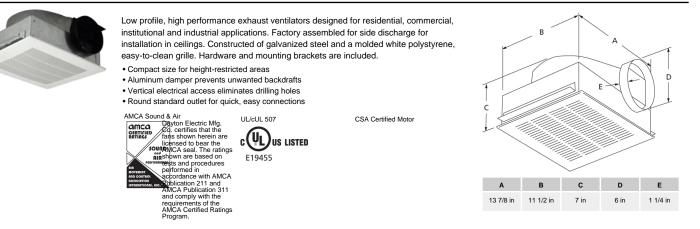

Performance Characteristics

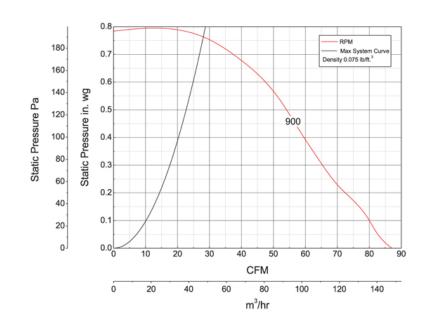

Construction Features

Impeller Type	Forward Curved Centrifugal			
Impeller Material	Galvanized Steel			
Max Inlet Temp	104 °F			
Warranty Length	1 Year			

Motor Information

Motor Item Number	21DV63
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Drip Proof
RPM	1,000 rpm
Full Load Amps	1.87

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP
	1000	CFM	443	405	351	306	
		1000	Sones	3.5	3.0	3.0	3.5

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings include the effects of an inlet grille and backdraft damper. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a spherical free field calculated per AMCA Standard 301. Values shown are for installation type B: Free inlet spherical sone levels.

Catalog 405, January 2010